


# Endura Z-Series Cap Plugs




## Replacement Instructions

### Product Reference Guide: Z-Series Adjustable Sills

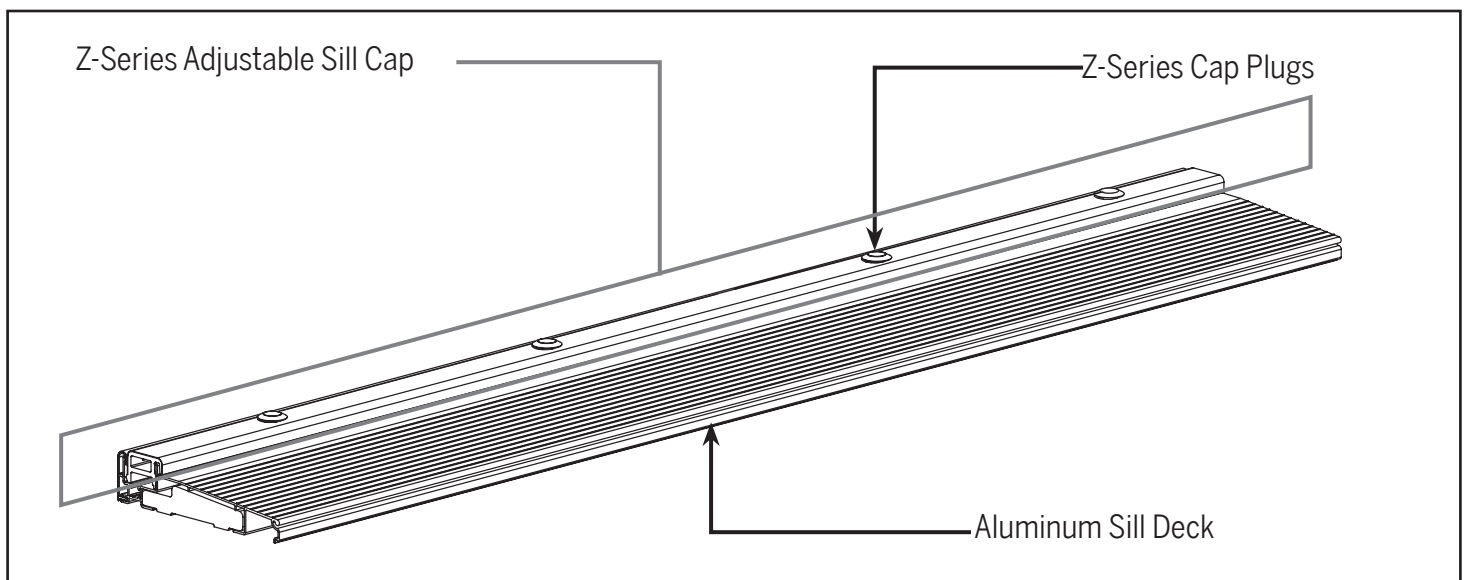

### REQUIRED TOOLS:


- **Putty Knife or Flathead screwdriver:** to pry off cap plug
- **Thin board or cloth:** to protect sill cap during old cap plug removal

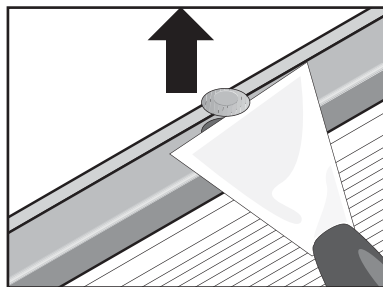

1. Pry off the old cap plugs from the sill cap using a putty knife, flathead screwdriver or similar tool.



Protect sill cap with a thin board or cloth to prevent damage when prying off cap plug(s)

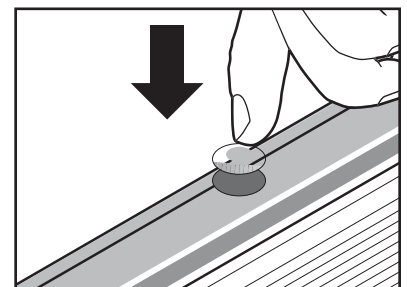

2. Install the replacement cap plug by centering it over the cap hole and pressing it down firmly until it snaps into place.