



8817 West Market Street, Colfax, NC 27235
800.334.2006 Fax: 336.668.4478
www.enduraproducts.com

Rev 01.07.19



The Simple Solution[®] Corner Pad:

Installation Instructions


Innovation protected under patents and patents pending in U.S.
and Canada. See www.EnduraPatents.com.

P/N: 219903


The Simple Solution® is a patented innovation in door system performance exclusively from Endura Products, Inc.

Adjustable Sills/ Oak Anchored Caps

1. Remove paper backing.
2. Align bottom of corner pad flush against the top of the sill cap.
3. Align with weatherstrip and jamb based on strike margins:
 - A. **For strike margins less than 5/32"** align edge of corner pad flush against weatherstrip kerf.
 - B. **For strike margins greater than or equal to 5/32"** align edge of corner pad flush against interior edge of the jamb.

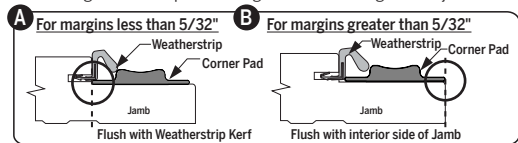


4. Press corner pad firmly into place against the jamb. Repeat on other jamb.



Z-Articulating Cap Sills™

1. Remove paper backing.
2. Align bottom of corner pad flush against the top of the Z-End Base™.
3. Align with weatherstrip and jamb based on strike margins:
 - A. **For strike margins less than 5/32"** align edge of corner pad flush against weatherstrip kerf.
 - B. **For strike margins greater than or equals to 5/32"** align edge of corner pad flush against interior edge of the jamb.

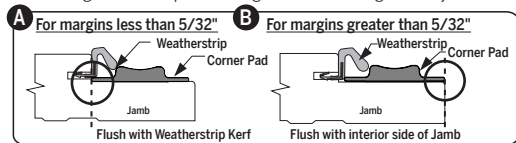

4. Press corner pad firmly into place against the jamb. Repeat on other jamb.

